

TEMPORARY ANCHOR

AP145



Temporary anchor for an easy and cost-effective fall arrest solution for maintenance workers regularly accessing unprotected roofs.



Product brochure
Temporary anchor



Operation manual
Temporary anchor

Find all related products and resources on our website
kattsafe.com.au


Commercial building height access and fall protection requirements

Kattsafe leads the industry in the design, installation and management of access and fall protection safety systems.

The in-action model demonstrates access and fall protection requirements for a commercial building design. Kattsafe recommendations fulfill current workplace requirements for the safety of building maintenance subcontractors, employees and the general public.


For more information please contact Kattsafe.
kattsafe.com.au

- 1 Anchor points
- 2 Static lines
- 3 Rigid rail
- 4 Davits and needles
- 5 Guardrail and walkway
- 6 Skylight protectors
- 7 Rung ladders
- 8 Access hatches
- 9 Platforms and stairs
- 10 Step ladders
- 11 HVAC platforms

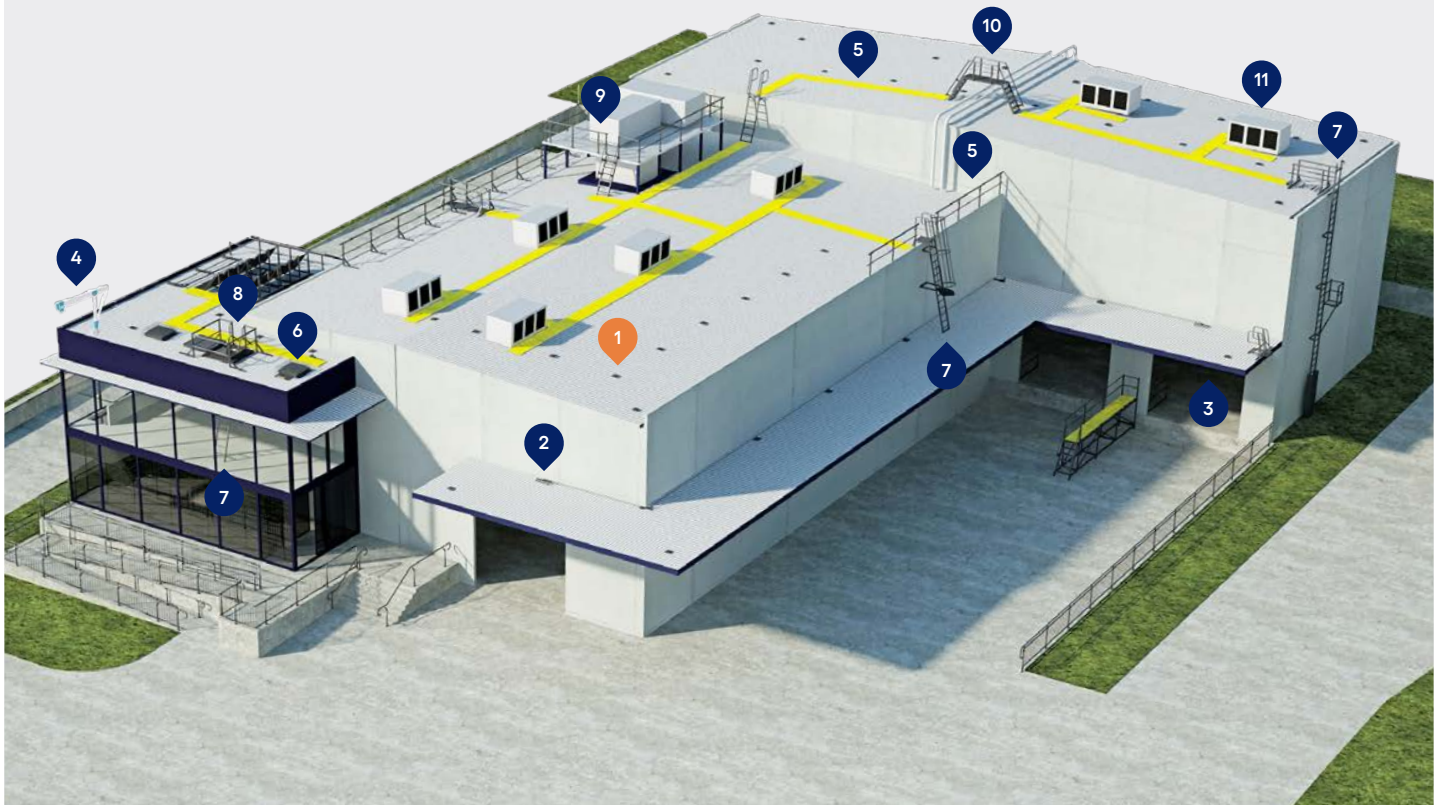

TEMPORARY ANCHOR

Temporary anchor for an easy and cost-effective fall arrest solution for maintenance workers regularly accessing unprotected roofs.

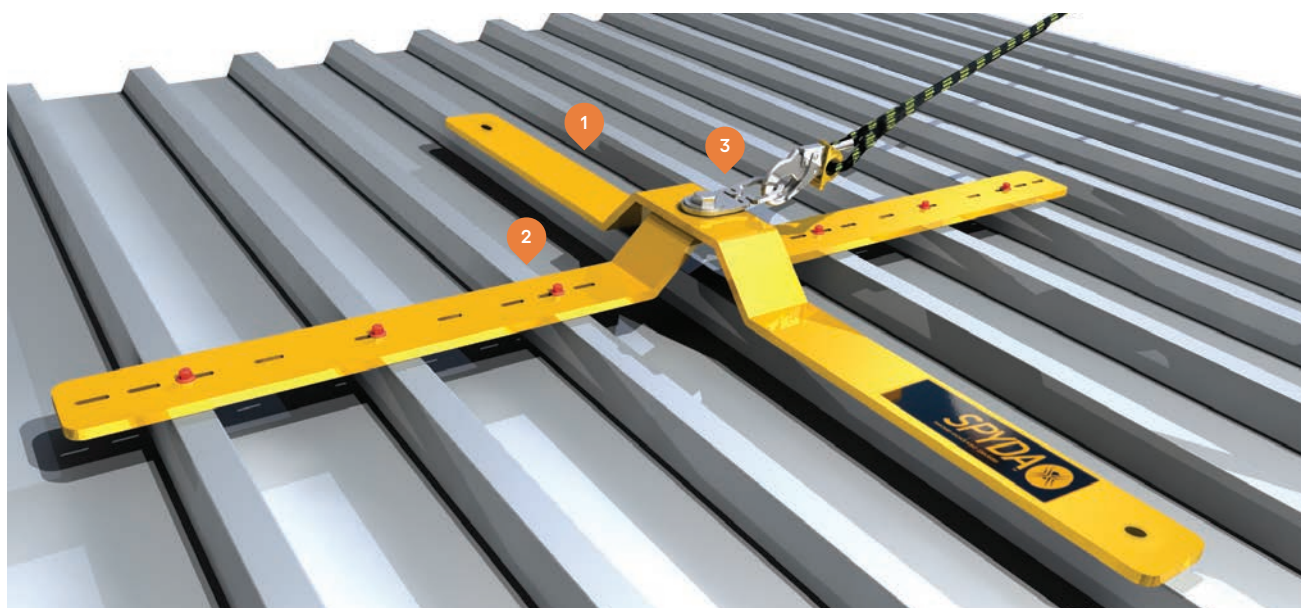

Foldable design

Anchor can be folded to fit into carry bag for easy transport.



Multiple mounting options

Ensuring the anchor can be fixed to multiple different roof decks. Clamps are used to mount to clip fix roofs (included with AP145C).



Swivel eyelet

Easy connection with a large eyelet, and swivelling feature means there is no risk of snap hook roll-out.


Proprietary temporary anchor system for safe work at height.

The Kattsafe temporary anchor provides effective lightweight and relocatable fall arrest for maintenance workers. With variable fixing options and adjustable pivot arms, it can fit onto most roofs in different applications.

In the event of a fall, the anchor provides uniform load distribution, and the unique energy absorbing swivel attachment point prevents snap hook roll-out.

Features and benefits of the system:


- Fall arrest use.
- 15kN rated.
- Simple installation with screw or clamp fix options.
- Easily portable due to its compact design and carry bags.
- Suitable for various roof decks.
- Weight range: 4.5 to 8.8kg (excluding fixings).

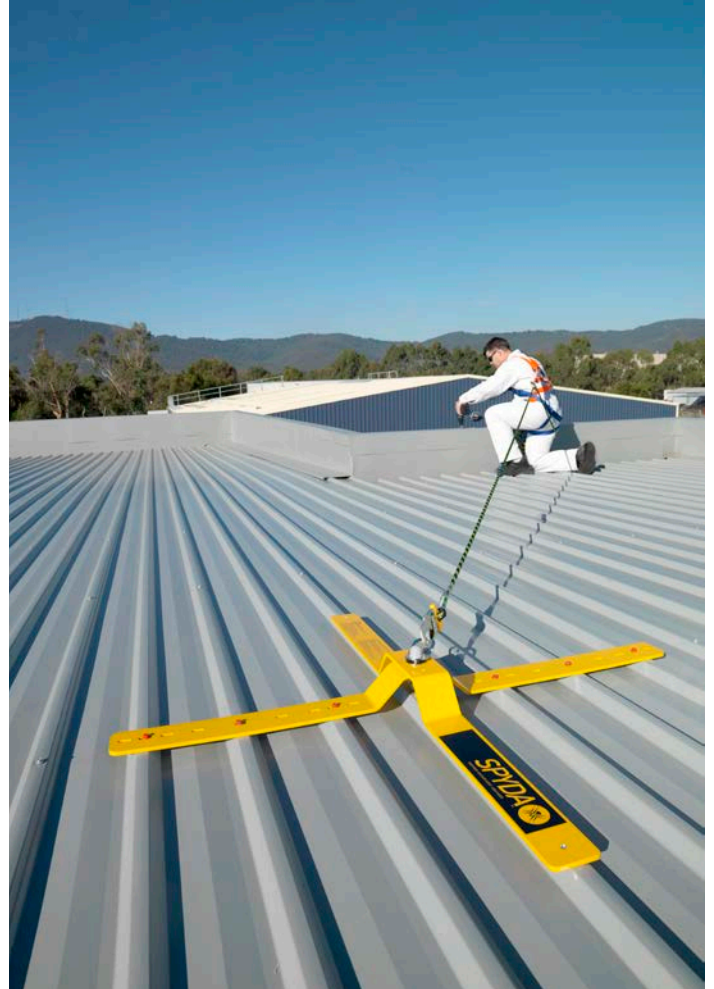

TEMPORARY ANCHOR CONFIGURATIONS

AP145S Temporary anchor - screw fix

Temporary anchor with screw fix mounting.

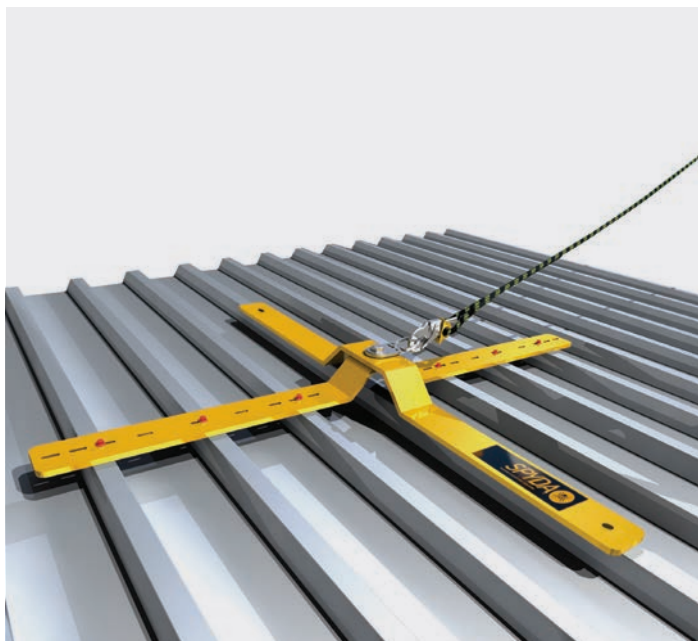

AP145C Temporary anchor - clamp and screw fix

Temporary anchor with and clamp set to mount to clip fix roofs.



TECHNICAL SPECIFICATION

Temporary anchor

AP145

Kattsafe temporary anchor for safe work at height. System design, supply, layout, installation and certification by a Kattsafe approved installer, as per the manufacturer's installation instructions and current standards.

Materials

- Anchor: High tensile aluminium - powder coated
- Swivel eye: Profiled stainless steel
- Deck clamps: High tensile extruded aluminium

Dimensions

- Arm length: 1270mm
- Total unit height: 120mm

Weight

- AP145S: 4.6kg (excludes fixings)
- AP145C: 8.8kg (excludes fixings)

Fixings (refer to operation manual)

- Metal: 14g 75mm type 17 self drilling tek screws
- Timber: 14g 75mm type 17 tek screws

Rating

Fall arrest: 15kN (single person use)

Compliance

The AP145 temporary anchor is designed and manufactured in accordance with requirements of Australian and New Zealand Standards AS/NZS 1891.4:2009 and relevant statutory WHS Codes of Practice/Guidelines.

Testing

- Testing and performance based on requirements of Australian and New Zealand Standards AS/NZS1891.4:2009 and AS/NZS 5532:2013
- Dynamic & static load tested: 15kN
- Resultant load on structure: 7.8kN

Product warranty

- 3 years from date of purchase subject to correct installation. Use and maintenance to be in accordance with manufacturer's specifications and recommendations. (This excludes wearing parts).
- This device has a 10 year usage life span after which it must be removed from service as per Australian and New Zealand Standards AS/NZS 1891.4:2009 and AS/NZS 5532:2013.

Inspection and maintenance

Inspection and certification required every 12 months by competent person in accordance with manufacturer's specifications and requirements of Australian and New Zealand Standard AS/NZS 1891.4:2009 Section 9 (refer to operation manual).

Important note

Failure to supply and/or install proprietary product in accordance with above standards and codes, specifications and instructions voids complete system certification and/or warranty

WARRANTY INFORMATION

Warranty period on this system:
3 years from date of purchase

Should you have a warranty claim as a result of a defect the following procedure must be followed:

Identify the following information:

- The product/system name and code number.
- The date of purchase/installation.
- Installation company details.
- The installation identification number.
- The name of the company using this system.
- A description of the defect/warranty claim.
- The periodic system maintenance report.

Forward the above information to sales@kattsafe.com.au or contact technical helpline, 1300 301 755.

Terms and conditions

All warranty claims must be made in writing within 14 days of the appearance of the defect.

Incorrect installation or work done by a non accredited Kattsafe system installer will void all warranty rights.

Systems that have been installed using non proprietary equipment will void all warranties.

System roof/cladding and concrete penetration seals are not covered in this warranty.

Systems/components that have not been maintained in accordance with manufacturer's/legislative requirements will void warranty.

Systems used by incompetent persons or use with non compatible accessories ie. harness gear, lanyards, travellers, fall arrestors etc. will void warranty.

Systems/components used for purposes other than their intended use will void warranty.

General wear and tear is expected and will depend on the frequency of use and is not covered by warranty.



Product brochure
Temporary anchor



Operation manual
Temporary anchor



QMS Certification
ISO 9001:2015

Find all related products and resources on our website.
kattsafe.com.au

Kattsafe

Height access
and fall protection

1029 Mountain Highway
Boronia Victoria 3155
Australia

1300 301 755
sales@kattsafe.com.au
kattsafe.com.au